



Dimensions mm[inch]

tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m

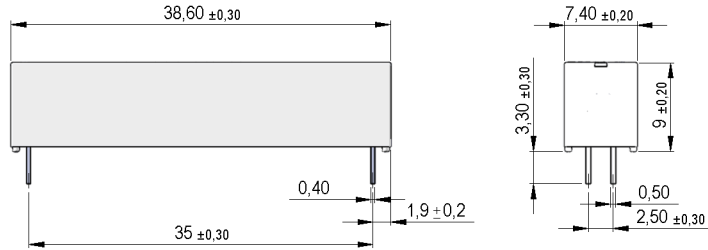


Isometric

Scale 1:1
Maßstab 1:1




Test circuit

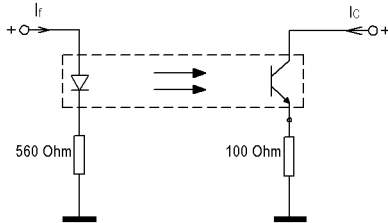


Layout

Top view
Draufsicht



Marking

according to EN60062/factory code
gem. EN60062/Fertigungsstätte



Elect. Coupler Characteristic	Conditions	Min	Typ	Max	Unit
Turn-on Time 1 Ton	If=10mA,Uce=5V,RL=100 Ohm		5,5		µS
Turn-Off Time 1 Toff	If=10mA,Uce=5V,RL=100 Ohm		4,2		µS
Current Transfer Ratio Ic/If CTR	If=10 mA	0,5	0,8		
Cut-Off Frequency 1 Fco	If=10mA,Uce=5V,RL=100 Ohm		50		kHz
Insulation Resistance Input/Output	RH 45%	1.000			GOhm
Insulation Voltage Input/Output Uio		10.000			VDC
Coupling capacitance Cc			0,1		pF
Creeping Distance		34			mm
Air Path Input/Output		34			mm
Insulation Distance Emitter-Detecto		5			mm

Maximum Ratings Emitter	Conditions	Min	Typ	Max	Unit
Forward Voltage Uf	If=10 mA			1,5	V
DC Forward Current If				100	mA
Reverse Voltage Ur	Ir=100 microA			5	V
Surge Forward current Ifs	t<=10 ms			500	mA
Current Reduction		0,73			mA/°C
Power Dissipation Ptot				170	mW

Maximum Ratings Detector	Conditions	Min	Typ	Max	Unit
Collector-Emitter Voltage Vce				32	VDC
Emitter-Collector Voltage Vec				5	VDC
Collector Dark Current Iceo	Uce=20V,R=1MOhm,If=0mA			0,2	µA
Collector-Emitter Saturation Voltag	If=10 mA, Ic=1 mA		0,3		VDC
Collector Peak Current Icm				75	mA
Collector Current Ic				15	mA
Power Reduction		0,91			mW/°C
Power Dissipation Ptot				100	mW

Special Product Data	Conditions	Min	Typ	Max	Unit
Case colour				white	
Housing material				PBT glass fibre reinforced	
Reach / RoHS conformity				yes	
Sealing compound				Polyurethan	



Europe: +49 / 7731 8399 0

| Email: info@standexmeder.com

Item No.:

USA: +1 / 508 295 0771

| Email: salesusa@standexmeder.com

5253003110

Asia: +852 / 2955 1682

| Email: salesasia@standexmeder.com

Item:

530-03-1-10

Environmental data	Conditions	Min	Typ	Max	Unit
Ambient Temperature Ta		-40		85	°C
Storage temperature		-40		100	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C
Shock	1/2 sine, duration 11ms, in 3 axis			50	g
Vibration	from 10 - 2000 Hz			20	g
Washability					fully sealed

Modifications in the sense of technical progress are reserved

Designed at: 22.05.14 Designed by: WKOVACS

Approval at: 26.05.14 Approval by: DSTASTNY

Last Change at: 16.10.14 Last Change by: DSTASTNY

Approval at: 16.10.14 Approval by: DSTASTNY

Version: 03